

MODEL STB 301




3 PHASE ISOLATE WINDING TRANSFORMER

SPECIFICATION

Number of Phase	3 PHASE
Winding Type	ISOLATE
Power Rated	1KVA.
Primary	380VAC.
Secondary	200VAC. 220VAC.
Current Pri.	1.5A.
Current Sec.	2.8A. 2.6A.
Frequency	50-60 Hz.
Insulation system	Class F : (155 °C)
Maximum System Voltage	600 V.
Altitude (Maximum)	1000 meters
Dielectric Strength	3000 Vdc. (4200Vp)
Impregnation	High Bond Strength Insulating Varnish Class F : (155 °C)

CONNECTION DIAGRAM

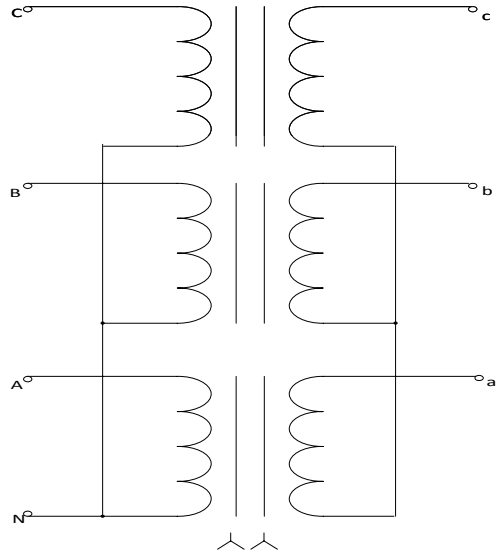

MATERIAL

Core Steel	Non-Oriented Magnetic Steel Gras RM-S14
Winding	Solid Copper Conductor (PEW 155 °C)
Sheet Insulation	Main Features (EM6) Class F (155 °C)
Terminals	Terminal TB 15A.

Dimension (mm)

W	L	H	Weight(Kg)
250	250	300	12