

**MODEL STB 380**




**3 PHASE ISOLATE WINDING TRANSFORMER SPECIFICATION**

Number of Phase	3 PHASE
Winding Type	ISOLATE
Power Rated	200KVA.
Primary	380VAC.
Secondary	200VAC. 220VAC.
Current Pri.	303A.
Current Sec.	577A. 524A.
Frequency	50-60 Hz.
Insulation system	Class F : (155 ° C)
Maximum System Voltage	600 V.
Ambient Temperature	40 ° C (maximum)
Temperature Rise	100 ° C (average)
Altitude (Maximum)	1000 meters
Dielectric Strength	3000 V. (4200Vp)
Impregnation	High Bond Strength Insulating Varnish Class F : (155 ° C)

**MATERIAL**

Core Steel	Non-Oriented Magnetic Steel Gras RM-S23
Winding	Solid Copper Conductor (PEW 155 ° C)
Sheet Insulation	Main Features (EM6) Class F (155 ° C)
Terminals	Copper bus bar

**CONNECTION DIAGRAM**

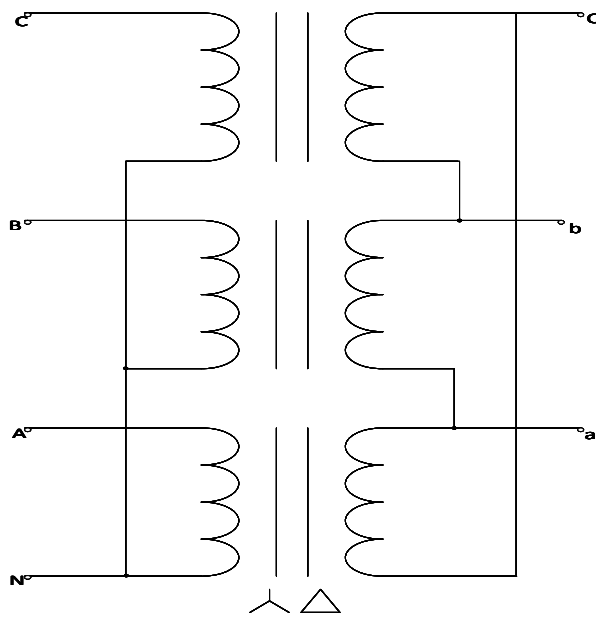

**Dimension ( mm )**

W	L	H	Weight ( Kg )
900	1050	1050	750